

PC Based Wide Belt In-Line Weigh Labeller

Model : TSWI700

PC Based weigh labeller which is able to handle pack widths of up to 350 mm. Its modular design allows for additional top, bottom or promotional labellers to be added at any time.

FEATURES

- user friendly, full colour TFT touch screen display
- printing by 80 mm wide, 300 DPI thermal head providing high print resolution and true type window print fonts
- capability to process trays or packs, wide edge leading to a maximum width of 350 mm
- standalone 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene, IP65 rated
- quick release conveyors & belts, removed easily without tools
- under/over setpoint linked to label print on in-range products (selectable for each PLU)
- on board help screens & videos includes programming, label roll changes, maintenance and fault finding
- Windows XP embedded, 20 Gb hard drive, 256 MB Ram, Intel Celeron processor
- USB memory back up

OPTIONS

- additional bottom labeller for promotional or supplementary labels to show ingredients, barcode or even the application of the primary price and barcode label
- 108 mm, 300 DPI thermal head
- TSHI700.NET back office data maintenance controlling software via Ethernet network



Refer page 2 for specifications

Specifications may change without notice


LABELLING EQUIPMENT

PC Based Wide Belt In-Line Weigh Labeller

Model : TSWI700

SPECIFICATIONS

Weighing Capacity	Up to 6 kg x 2 g
Package Size	Length: 80 - 300 mm Width: 40 - 350 mm Height: 180
Label Size	Minimum: 30 mm wide x 28 mm high Maximum: 120 mm wide x 150 mm high
Label Roll	300 mm outside diameter, 76 mm core, inside or outside wound
Label Application	by 10 finger touch applicator
Print Method	direct thermal, 300 DPI (12 dots/mm)
Operating Speed	70 packs/min for 110 mm high label ≤ 3 kg capacity 60 packs/min for 110 mm high label > 3 kg capacity Speed is dependent on label length and printed information
HDD Capacity	20 Gb
Power Requirements	240V AC 50 Hz single phase
Air Requirements	Minimum 4 bar at 50 to 300 litres/min external clean, dry air
IP Protection	Console: to IP65 standard Labeller: to IP43 standard Conveyor: to IP65 standard
Operating Temp.	0 to +40 degrees celsius
Operating Humidity	15 to 85% RH

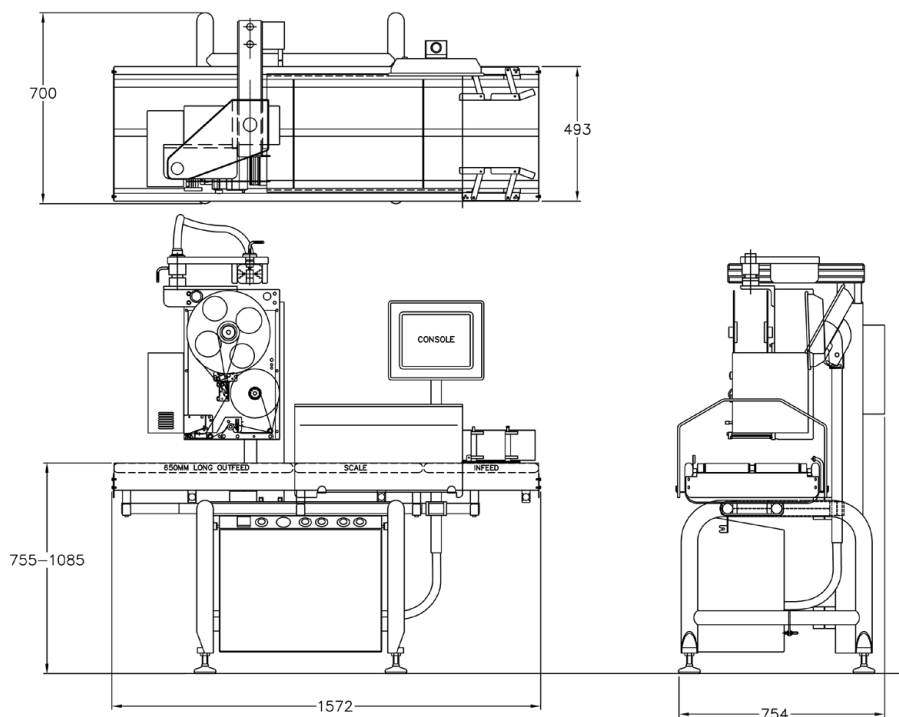

Specifications may change without notice

LABELLING EQUIPMENT

LABELS | LABELLING EQUIPMENT | PACKAGING EQUIPMENT
ESL & DIGITAL SIGNAGE | WEIGHING SCALES | POS SYSTEMS
FOOD EQUIPMENT | MAINTENANCE & REPAIRS | HIRE

0800 800 379
enquiries@wedderburn.co.nz
www.wedderburn.co.nz