

# Continuous Band Sealer Vertical

Model : WSCBSV

Our stainless steel vertical continuous band sealing machines speed up production and make light work out of sealing plastic bags and film. The optional embossing attachment enables date and lot coding to be applied in the seal. These reliable machines are engineered for many industries including; food, medical, cosmetics and componentry.

## FEATURES

- suitable for sealing small packages
- durable stainless steel construction
- easy to use as the operator only needs to feed the bags or material into the machine
- temperature controller ensures consistent temperature throughout the operation for quality sealing
- temperature can be adjusted to suit the job at hand
- conveyor belt speed regulation
- sealing direction is left to right
- distance between the between conveyor and sealer can be adjusted to suit the item currently being sealed

## OPTIONS

- horizontal model available upon request (WSCBSH)
- embossing attachment
- counting device



Refer to page 2 for specifications

Specifications may change without notice

## PACKAGING EQUIPMENT

LABELS | LABELLING EQUIPMENT | PACKAGING EQUIPMENT  
ESL & DIGITAL SIGNAGE | WEIGHING SCALES | POS SYSTEMS  
FOOD EQUIPMENT | MAINTENANCE & REPAIRS | HIRE



0800 800 379  
enquiries@wedderburn.co.nz  
www.wedderburn.co.nz

# Continuous Band Sealer Vertical

Model : WSCBSV

## SPECIFICATIONS

Machine dimensions (mm):	840 (W) x 380 (L) x 550 (H)
Sealing width (mm):	8
Distance from sealer to conveyor (mm):	150 - 270
Temperature range (°C):	0 - 300
Conveyor size (mm):	840 (W) x 153 (D)
Max. conveyor loading	
Single package:	1 kg
Total load:	3 kg
Voltage:	AC 220/50 Hz
Net weight:	37 kg

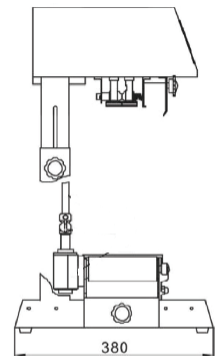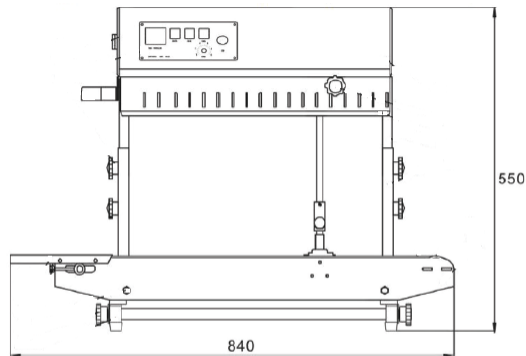

## PACKAGING EQUIPMENT

LABELS | LABELLING EQUIPMENT | PACKAGING EQUIPMENT  
ESL & DIGITAL SIGNAGE | WEIGHING SCALES | POS SYSTEMS  
FOOD EQUIPMENT | MAINTENANCE & REPAIRS | HIRE

Specifications may change without notice

0800 800 379  
[enquiries@wedderburn.co.nz](mailto:enquiries@wedderburn.co.nz)  
[www.wedderburn.co.nz](http://www.wedderburn.co.nz)

## SPECIFICATIONS

Packaging Type	Tray Sealing
Packaging Rate	Up to 5 cycles per minute
* MAP Capable	<input checked="" type="checkbox"/> Yes or <input type="checkbox"/> No
Film Width - Maximum (mm)	430
Film Diameter - Maximum (mm)	220
Film Core - Maximum (mm)	75
Tray Dimensions - Maximum (mm)	380 (W) x 230 (D) x 70 (H)
Operator Panel	User friendly touch screen
Power Required	Single phase 230 V 1.5 kW 10 A
MAP Gas Pressure Requirement	4 - 6 bar
Overall Dimensions	705 (W) x 850 (D) x 800 (H)
Net Weight of Machine	100 kg approx
*Operation	<input type="checkbox"/> Manual <input checked="" type="checkbox"/> Semi automatic <input type="checkbox"/> Automatic

### *\*Suitable For:*

- ☐ Health and Fitness
- ☐ Hospitality
- ☐ Laboratory and Education
- ☐ Retail Food
- ☐ Retail Meat and Seafood
- ☐ Retail Non-Food
- ☒ Retail Supermarkets
- ☐ Retail Pharmacies and Veterinary Care
- ☒ Manufacturing and Processing - Food & Beverage
- ☐ Manufacturing and Processing - Non-Food
- ☐ Materials Handling

### **NOT** Available to purchase on-line

#### Size for freight estimate

- ☐ Small box. 27 (L) x 22 (W) x 25 (H). Based on TSDI166
- ☐ Medium box. 49 (L) x 48 (W) x 31 (H). Based on TSDS983
- ☐ Large box. 63 (L) x 48 (W) x 34 (H). Based on TSSM5300
- ☐ X Large box. 106 (L) x 59 (W) x 28 (H). Based on TSDS531
- ☒ Overweight. Above 25kg