

PC Based High-Speed In-Line Weigh Labeller

Model: TSHI701

Increase your production line throughput with the TSHI701 high-speed in-line weigh labeller. With PC touch screen operation and modular design it will grow with your business.

FEATURES

TSHI701

- legal for trade use (MCA # 1791)
- user friendly, full colour TFT touch screen display
- printing by 108 mm wide, 300 dpi thermal head providing high print resolution and true type window print fonts
- modular 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene, IP65 rated
- quick release conveyors & belts, removed easily without tools
- under/over setpoint linked to label print on in-range products (selectable for each PLU)
- on board help screens & videos include programming, label roll changes, maintenance and fault finding
- Windows XP embedded, 20 Gb hard drive, 256 M Ram, Intel Celeron processor
- USB memory back up

OPTIONS

- additional top or bottom labellers for promotion or supplementary labels to show ingredients or similar information. Up to a maximum of 5 labellers in combination
- interchangeable V deck conveyors for round shaped products
- long scale conveyor versions for items up to 475 mm in length
- HA-752 C wrap labeller for single label application to top, side and bottom of trays
- power drop flap conveyor, single or twin sweep arm rejectors
- 80 mm, 300 dpi thermal head
- TSHI700.NET back office data maintenance controlling software via Ethernet



Specifications may change without notice

▲ **Labelling Equipment.**


*Weighing Scales. Packaging Equipment. Labelling Equipment.
Labels. Food Equipment. POS Solutions. Maintenance & Repairs.*

PC Based High-Speed In-Line Weigh Labeller

Model : TSHI701

SPECIFICATIONS

Weighing Capacities	3 kg x 1 g 6 kg x 2 g
Package Size (mm)	Width: 40 - 250 Length: 80 - 300 Height: 180 (maximum)
Label Size (mm)	Minimum: 30 (W) x 28 (H) Maximum: 120 (W) x 150 (H)
Label Roll	300 mm outside diameter, 76 mm core, inside or outside wound
Label Application	10 finger touch applicator
Print Method	direct thermal, 300 dpi or 12 dots/mm
Operating Speed	90 packs per minute for 100 mm high. Label speed is dependent on label length and printer information
HDD Capacity	20 Gb
Power Requirements	240V AC 50 Hz single phase
Air Requirements	Minimum 4 bar at 50 to 300 litres per minute external clean, dry air
IP Protection	Console: IP65 Labeller: IP43 Conveyor: IP65
Operating Temperature	0 to +40 degrees celsius
Operating Humidity	15 to 85% RH

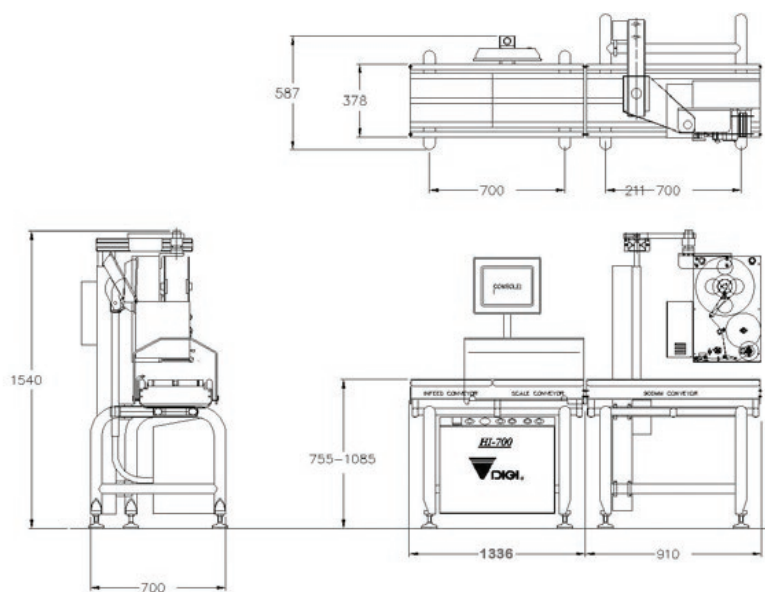

Specifications may change without notice