



PC Based Mid Speed In-Line Weigh Labeller - Cassette

Model : TSLI700DTC

Increase your production line throughput with the LI700DTC mid speed in line weigh labeller. With PC touch screen operation, quick change cassette style labeller, single framed compact design and operating speed up to 65 ppm it offers a cost effective solution for almost all food weigh price labelling requirements.

FEATURES

- legal for trade use (MCA # 2075)
- ability to provide Random Weight, A.Q.S or Θ mark and fixed weight operation
- user friendly, full colour TFT touch screen display
- quick change Top Cassette Style labeller, reliable and cost effective suitable for inside or outside wound labels
- unique Cassette ID to ensure correct labels are loaded for selected product
- printing by 80 mm wide 300 dpi thermal head providing high print resolution and TrueType Windows print fonts
- modular 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene
- under/over setpoint linked to label print on in-range products (selectable for each PLU)
- on board help screens & videos include programming, label roll changes, maintenance and fault finding
- Windows 10 embedded, 40 GB hard drive, 2 GB RAM, Intel Bay Trail N2930
- USB memory back up

OPTIONS

- interchangeable V deck conveyors for round shaped products
- long scale conveyor versions for items up to 475 mm in length
- single or twin sweep arm rejectors
- cassette bottom labeller and bottom of trays



11 touch fingers for accurate label application across all product shapes



Refer page 2 for specifications

Specifications may change without notice

LABELLING EQUIPMENT

LABELS | LABELLING EQUIPMENT | PACKAGING EQUIPMENT
ESL & DIGITAL SIGNAGE | WEIGHING SCALES | POS SYSTEMS
FOOD EQUIPMENT | MAINTENANCE & REPAIRS | HIRE


0800 800 379
enquiries@wedderburn.co.nz
www.wedderburn.co.nz

PC Based Mid Speed In-Line Weigh Labeller

Model : TSLI700DTC

SPECIFICATIONS

Weighing Capacities	6 kg x 1 g 10 kg x 2 g
Package Size	Length: 80 - 300 mm Width: 40 - 250 mm Height: 180 mm Maximum
Label Size Top Label	Minimum: 40 mm wide x 28 mm high Maximum: 80 mm wide x 120 mm high
Label Size Bottom Label	Minimum: 40 mm wide x 28 mm high Maximum: 80 mm wide x 100 mm high
Label Roll	190 mm outside diameter, 76 mm core, inside or outside wound
Label Application	Top Label by 11 finger touch positive applicator Bottom Label by wipe on application
Print Method	direct thermal, 80 mm wide 300 DPI (11.8 dots/mm)
Operating Speed	up to 65 packs per minute - speed is dependent on label length and printer information
HDD Capacity	40 GB
Power Requirements	240V AC 50 Hz single phase
Air Requirements	Minimum 4 bar at 50 to 300 litres/min external clean, dry air
IP Protection	Console: to IP65 standard Labeller: to IP43 standard Conveyor: to IP65 standard
Operating Temp.	0 to +30 degrees celsius
Operating Humidity	15 to 85% RH

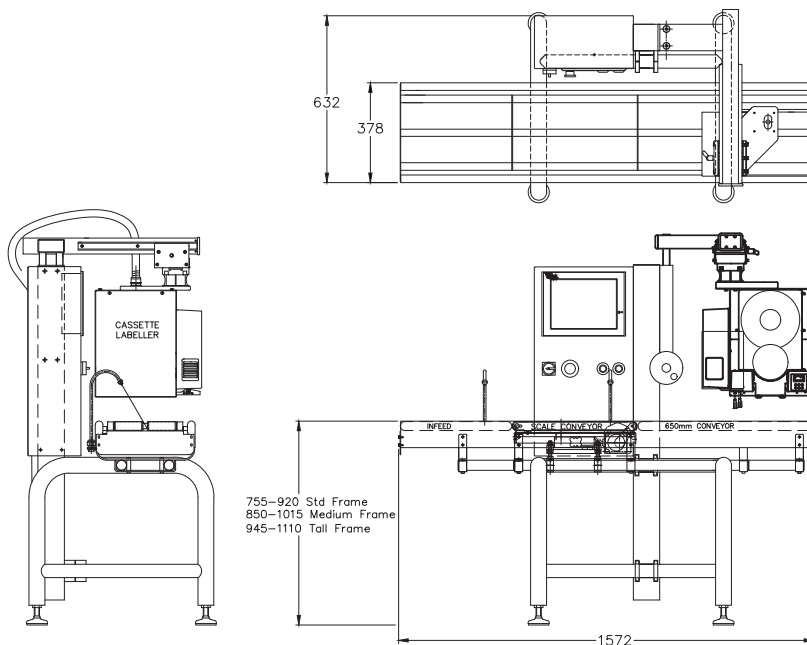

Optional Top & Bottom Variant

Specifications may change without notice

LABELLING EQUIPMENT

LABELS | LABELLING EQUIPMENT | PACKAGING EQUIPMENT
ESL & DIGITAL SIGNAGE | WEIGHING SCALES | POS SYSTEMS
FOOD EQUIPMENT | MAINTENANCE & REPAIRS | HIRE

0800 800 379
enquiries@wedderburn.co.nz
www.wedderburn.co.nz