

PC Based High-Speed In-Line Labeller

Model: TSHC700

PC based high-speed labeller for high resolution label printing. Featuring a full colour TFT touch screen display and on board help videos. The sturdy stainless steel frame is designed for ease of cleaning and hygiene. IP65 ingress protection rating.


FEATURES

TSHC700

- user friendly, full colour TFT touch screen display
- printing by 80mm wide, 300 DPI thermal head providing high print resolution, and true type window print fonts
- modular 304 stainless steel open frame design conveyor, enhanced ease of cleaning and hygiene, IP-65 rated
- quick release conveyors & belts, removed easily without tools
- on board help screens & videos includes programming, label roll changes, maintenance & fault finding
- Windows XP embedded, 20Gb hard drive, 256 M Ram, Intel Celeron processor
- USB memory back up

OPTIONS

- additional top or bottom labellers for promotion or supplementary labels to show ingredients or similar information
- 108mm, 300 DPI thermal head
- interchangeable V Deck conveyor for round shaped products
- TSHI700.NET back office data maintenance controlling software via Ethernet network

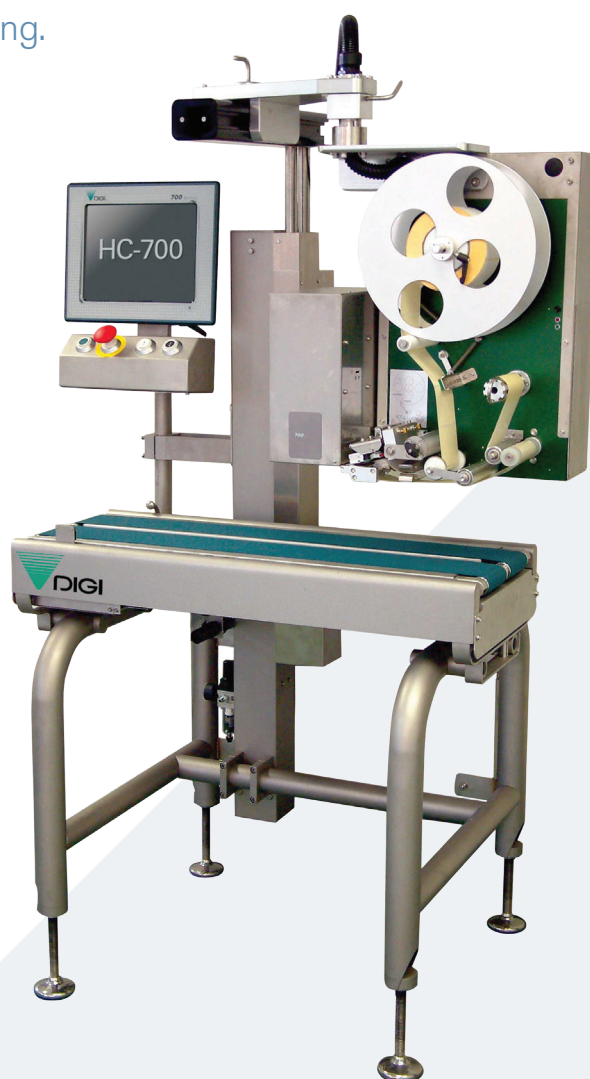

Specifications may change without notice


▲ **Labelling Equipment.**

*Weighing Scales. Packaging Equipment. Labelling Equipment.
Labels. Food Equipment. POS Solutions. Maintenance & Repairs.*

PC Based High-Speed In-Line Labeller Model : TSHC700

SPECIFICATIONS

Package Size (mm)	Width: 40 - 250 Length: 80 - 300 Height: 180 (maximum)
Label Size (mm)	Minimum: 30 (W) x 28 (H) Maximum: 120 (W) x 150 (H)
Label Roll	300mm outside diameter, 76mm core, inside or outside wound
Label Application	10 finger touch applicator
Print Method	direct thermal, 300 dpi or 12 dots/mm
Operating Speed	90 packs per minute for 100mm high. Label speed is dependent on label length and printer information
HDD Capacity	20 Gb
Power Requirements	240V AC 50 Hz single phase
Air Requirements	Minimum 4 bar at 50 to 300 litres per minute external clean, dry air
IP Protection	Console: IP65 Labeller: IP43 Conveyor: IP65
Operating Temperature	0 to +40 degrees celsius
Operating Humidity	15 to 85% RH

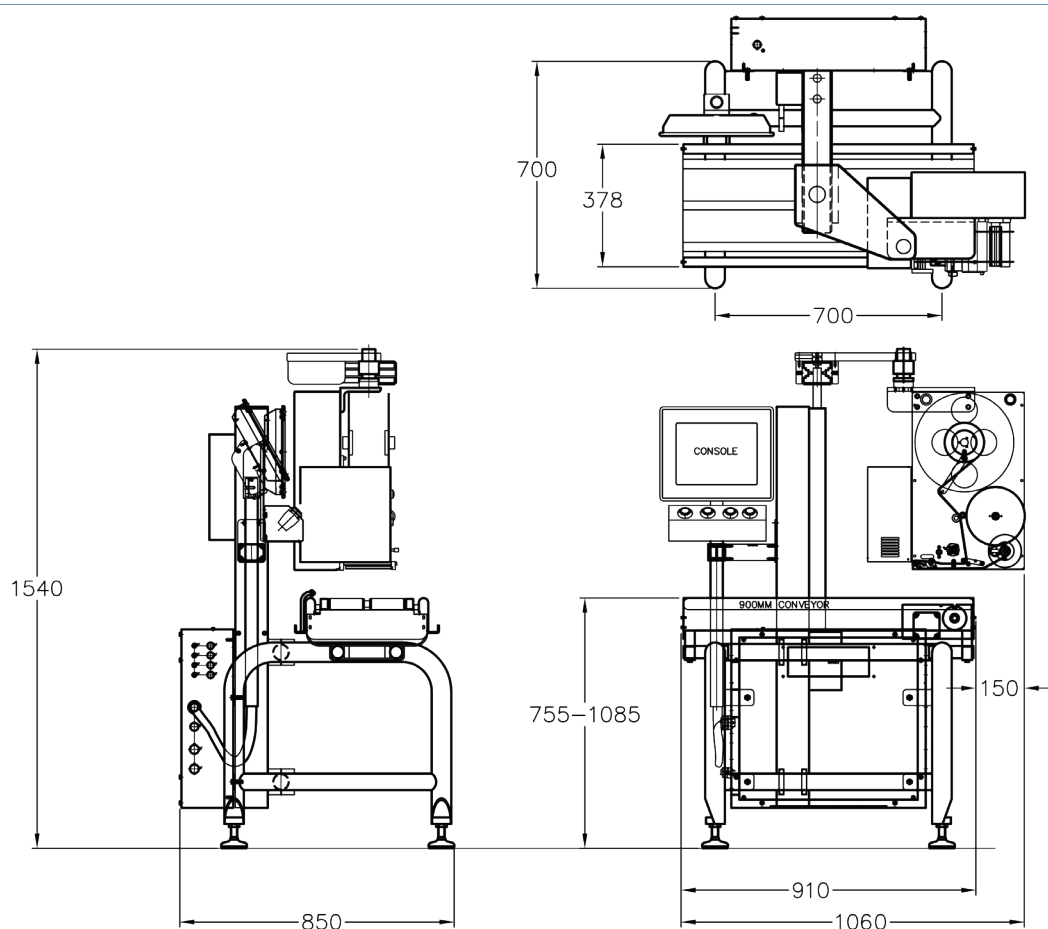

Specifications may change without notice