

Digital Crane Scale with Optional Remote Display

Model : WS601RF

WS601RF Crane Scales are engineered for safe overhead weighing and tension tasks. They come in several different capacities up to 15 ton (15,000 kg) and have the option of various factory-fitted remote weight indicators.

The WS601RF Crane Scale delivers a safe, precise and efficient weighing solution for any industrial environment that prohibits operator access or visibility to the scale hook.

FEATURES

WS601RF

- super bright 45 mm high red LED display
- cast aluminium alloyed housing
- patented load cell & overload protection design
- 360 degree swivel hook
- safe overload of 250% of rated capacity
- ultimate overload of 500% of rated capacity
- built-in rechargeable battery, approximately 150 hours usage
- low battery power indication
- high accuracy up to 1/3000
- remote controller (as pictured)

OPTIONAL ACCESSORIES

- variety of RF remote displays available (refer page 2). Remote displays are factory fitted so must be ordered at the same time you purchase your WS601RF Crane Scale
- Dot Matrix Printer with RS232 output



VARIATIONS

Model Number	Max Capacity	Graduation	Overall Dimensions (mm)
WS601RF5T	5,000 kg	2 kg	270 (W) x 205 (D) x 813 (H)
WS601RF7.5T	7,500 kg	2 kg	270 (W) x 205 (D) x 945 (H)
WS601RF10T	10,000 kg	5 kg	270 (W) x 205 (D) x 945 (H)
WS601RF15T	15,000 kg	5 kg	270 (W) x 205 (D) x 1180 (H)

Specifications may change without notice

INDICATOR OPTIONS

WS601RF



WS6RF15005A HANDHELD RF WEIGH INDICATOR

- black LCD 12 mm display with backlight
- power: "AA" size 1.5 V alkaline battery, 6 pcs (not included)
- up to 100 hours operating time, depending on backlight use
- key functions: ON/OFF, HOLD, TARE, NET/GROSS, MODE, ZERO
- selectable automatic power-off for power setting



WS6RF1018A LARGE DISPLAY RF WEIGHT INDICATOR

- wall mounted design
- RED 45 mm high LED display
- key functions: ON/OFF, HOLD, TARE, NET/GROSS, MODE, ZERO
- power: 220 V AC
- optional RS232C output, remote controller



WS6RF1023A LARGE DISPLAY RF WEIGHT INDICATOR

- wall mounted design
- RED 58 mm high LED display
- key functions: ON/OFF, HOLD, TARE, NET/GROSS, MODE, ZERO
- power: 220 V AC
- optional RS232C output, remote controller



WS6RF1040A SUPER LARGE DISPLAY RF WEIGHT INDICATOR WITH REMOTE CONTROLLER

- wall mounted design
- RED 100 mm high LED display
- remote keypad functions: ON/OFF, HOLD, TARE, NET/GROSS, MODE, ZERO
- power: 220 V AC
- optional RS232C output, remote controller



WS6RF1106A PRINTER TYPE RF WEIGHT INDICATOR

- RED 15 mm high RED LED display
- power: 220 V AC
- printer: impact dot matrix
- type size: 5 x 7 dot, 2.4 mm high, 24 characters per line
- printing speed: approx 1.7 lines/sec
- paper size (mm): 57 (width) x 60 (length) x 60 (diameter)
- weight data: DATE, PART NO., HIGH/LOW LIMIT WEIGHT, AUTO M+, TARE WEIGHT, NET WEIGHT, GROSS WEIGHT, TOTAL WEIGHT
- accessories: one ink ribbon, one paper roll
- optional RS232C output


Specifications may change without notice

SPECIFICATIONS

Legal for Trade Use	No
Scale Type	Overhead
Display Type	Digital Red LED
Display Size	45 mm high
Display Range	Single
2nd Remote Display	Optional factory fitted remote displays available Must be ordered when initially purchasing your WS601RF Crane Scale
Weighing Units	kg
Hook and Shackle Included	Yes
Hook Type	Swivel
Safe Overload Rating	250% of rated capacity
Ultimate Overload Rating	500% of rated capacity
RF Functionality	Yes
Remote Control	Optional
Battery Type	Rechargeable Battery
Environment Suitability	Dry

DIMENSIONS

Capacity (kg)	5T	7.5T, 10T	15T
A	270	270	270
B	205	205	205
C	813	945	1180
D	90	110	150
E	120	150	175
F	40 x 32	45 x 36	60 x 50
G	38	45	70
Net Weight (kg)	30	44	80

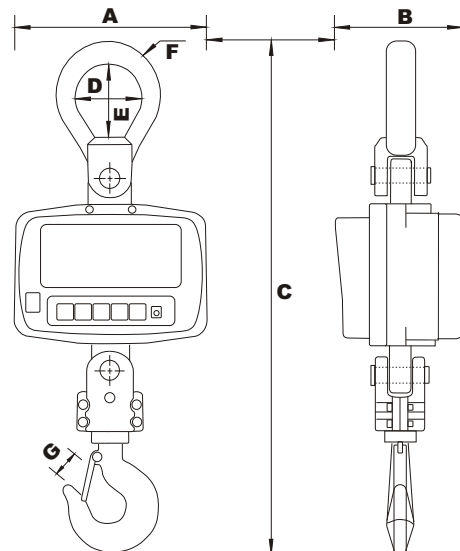

Specifications may change without notice